



RFID support

Built-in voice, microphone and speaker



A Series SmartLink HMI

11 Highlights

- Enable simple connection between HMI, mobile phone, tablet, computer, TV, camera and other HMIs in local area network.
- Enable simple connection between HMI, mobile phone, tablet, computer, TV, camera and other HMIs over the Internet.
- Allow remote access for multiple concurrent users without SCADA in the cloud or VNC connection.
- Provide data transmission and data storage in any public or private server.
- Integrate data with ERP, MES or other applications by MQTT, OPC UA, HTTP, TCP and etc.
- Embed the display of HMI in other applications like software, APP and etc.
- Use mobile phone as a scanner to scan barcode and enter information in HMI.
- Apply to data visualization or centralized control on large screen by TVBOX.
- Support Beidou positioning and trajectory tracking.
- Include intelligent functions such as TTS output, intercom, audio and video file playback, video surveillance, RFID/NFC recognition and etc.
- Use innovative design including HD screen, narrow bezel and optional features like eSIM, microphone, speaker and RFID reader.

Model List

Model	TFT Screen	Storage	LAN+COM	USB	intelligentize	Voice	Local video	RFID	Satellite positioning	WIFI	Wireless	Hole Size W×H(mm)	Dimension W×H×D(mm)
A7	7" 1024*600 HD	4G+512M	1+3	1	speaker	Yes						187x114 Chamfer: R7mm	193x120x32mm
A7-G		4G+512M	1+3	1	speaker	Yes					*Built in eSIM		
A7-W		4G+512M	1+3	1	speaker	Yes				Yes			
A7-GP		4G+512M	1+3	1	speaker	Yes			Yes		*Built in eSIM		
A7-GW		4G+512M	1+3	1	speaker	Yes				Yes	*Built in eSIM		
A7-E		4G+512M	1+3	1	speaker	Yes					Global 4G		
A7-EW		4G+512M	1+3	1	speaker	Yes				Yes	Global 4G		
A7 Pro		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes					
A7 Pro-G		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes			*Built in eSIM		
A7 Pro-W		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes			
A7 Pro-GP		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes	Yes		*Built in eSIM		
A7 Pro-GW		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes	*Built in eSIM		
A7 Pro-E		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes			Global 4G		
A7 Pro-EW		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes	Global 4G		
A10	10.1" 1280*800 HD	4G+512M	1+3	1	speaker	Yes						254x161 Chamfer: R7mm	260x167x32mm
A10-G		4G+512M	1+3	1	speaker	Yes					*Built in eSIM		
A10-W		4G+512M	1+3	1	speaker	Yes				Yes			
A10-GP		4G+512M	1+3	1	speaker	Yes			Yes		*Built in eSIM		
A10-GW		4G+512M	1+3	1	speaker	Yes				Yes	*Built in eSIM		
A10-E		4G+512M	1+3	1	speaker	Yes					Global 4G		
A10-EW		4G+512M	1+3	1	speaker	Yes				Yes	Global 4G		
A10 Pro		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes					
A10 Pro-G		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes			*Built in eSIM		
A10 Pro-W		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes			
A10 Pro-GP		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes	Yes		*Built in eSIM		
A10 Pro-GW		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes	*Built in eSIM		
A10 Pro-E		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes			Global 4G		
A10 Pro-EW		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes	Global 4G		
A15	15.6" 1920x1080 HD Capacitive touch	4G + 1G	2+3	2	speaker	Yes						383x245 Chamfer: R7mm	394x256x45mm
A15-G		4G + 1G	2+3	2	speaker	Yes					*Built in eSIM		
A15-W		4G + 1G	2+3	2	speaker	Yes				Yes			
A15-GP		4G + 1G	2+3	2	speaker	Yes			Yes		*Built in eSIM		
A15-GW		4G + 1G	2+3	2	speaker	Yes				Yes	*Built in eSIM		
A15-E		4G + 1G	2+3	2	speaker	Yes					Global 4G		
A15-EW		4G + 1G	2+3	2	speaker	Yes				Yes	Global 4G		
A15 Pro		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes					
A15 Pro-G		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes			*Built in eSIM		
A15 Pro-W		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes			
A15 Pro-GP		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes	Yes		*Built in eSIM		
A15 Pro-GW		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes	*Built in eSIM		
A15 Pro-E		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes			Global 4G		
A15 Pro-EW		4G + 1G	2+3	2	microphone speaker	Yes	Yes	Yes		Yes	Global 4G		

*The only supported country is China

Features



Connection in LAN

All models have built-in IIoT technology which enables local access and open interface without internet.



Video surveillance

HMI can connect with camera supporting RTSP or EZVIZ protocol by Ethernet. The camera can be watched on HMI and APP.




(Only supported in Pro version)



Cloud maintenance

It's easier for manufacturers to manage equipments by using remote maintenance function.

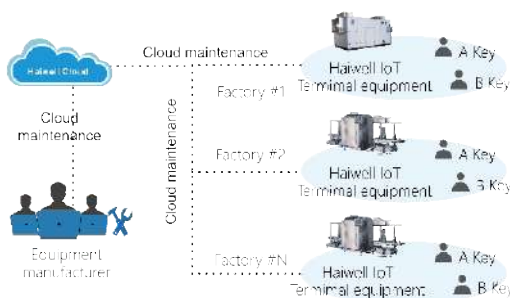

Video playing

You can play video on HMI. The supported format is Mp4.



(Only supported in Pro version)



Data security

The user data is not stored in Haiwell cloud. All the data can be stored in private or public server assigned by users.




Web API

Users can get the data and control device on their own platform or software by Web API in local area network or over Internet.



MQTT protocol

MQTT protocol is supported and applied to the connection with ERP/MES/database.

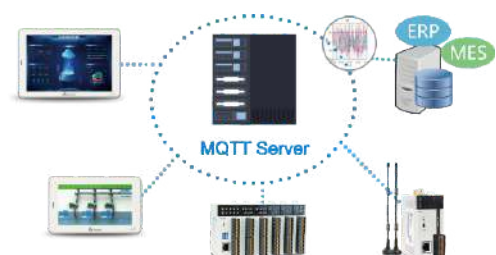

IoT platform

All models support the connection to Alibaba Cloud IoT, AWS IoT and Google Cloud IoT Core.




Currently supported IOT platforms. Keep updating...



Display integration

The display of HMI can be embedded in other applications such as software, website, APP and etc so that they have remote access to HMI.

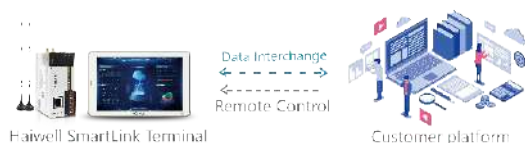

Remote centralized control

All the data of remote devices can be acquired through MQTT broker for centralized control. Users don't even need to deploy server if using cloud data center.



Text to speech

The english text can be converted into voice through built-in speaker. Audio files can also be played.



Support text to speech



Support voice broadcast



Support voice intercom



built-in multimedia hardware



Support remote intercom and broadcast with mobile phone



Mobile scanner

You can turn your mobile phone into a barcode scanner and enter information everywhere. It's more convenient than external scanner.



Mobile authentication

The identity of operator can be verified by using NFC recognition or scanning a QR code with mobile phone.




RFID/NFC

HMI supports reading RFID tags and NFC recognition, which can be applied to user login and access control.



Digital display board

The production data, device state and video surveillance can be viewed on large screen by connecting with TVBOX. It can be applied to data visualization and centralized control.

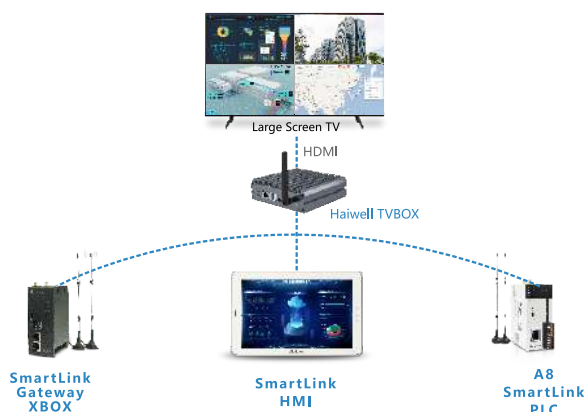

Satellite positioning

Support Beidou positioning and trajectory tracking. Users can check the realtime position of devices.



Specification

Specification		A7		A7 Pro	A10	A10 Pro	A15	A15 Pro
Software	Programming software	Haiwell Cloud SCADA						
Display	Screen size	7"TFT			10.1"TFT		15.6" TFT	
	Resolution	1024x600 pixels			1280x800 pixels		1920x1080 pixels	
	Display color	16.7M					262K	
	Brightness	450 cd/m²			450 cd/m²		350cd/m²	
	Viewing angle	85'/85'/85'/85'			85'/85'/85'/85'		85'/85'/85'/85	
	Touch panel type	Analog resistive film					Capacitive Touch screen	
Backlight	Type	LED						
	Life	50,000 hours						
	Auto sleep function	Yes						
Hardware	Flash	4G						
	RAM	512M	1G	512M	1G	1G	1G	
	Ethernet port	10/100 Base-T*1	10/100 Base-T*2	10/100 Base-T*1	10/100 Base-T*2	10/100 Base-T *2		
	Serial port	COM1:RS232*1 COM2:RS485*1 COM3:RS485*1						
	USB	USB 2.0 *1	USB 2.0 * 2	USB 2.0 *1	USB 2.0 * 2	USB2.0 * 2	USB2.0 * 2	
	RTC	Yes						
Power	Rated input power	24V Dc±20%						
	Power consumption	10W@24V DC			13W@24V DC		15W@24V DC	
	Power protection	Surge protection and anti-reverse protection						
	Withstand voltage	500VAC						
	Insulation resistance	50MΩ @500VDC or more						
	Vibration resistance	10 - 25Hz: 2G/30 minutes in each of X,Y or Z direction						
Enviroment	Cooling method	Natural air circulation						
	Protection grade	Front: Ip65						
	Storage temperature	-20 ~70℃						
	Operating temperature	-10℃ ~ 60℃						
	Relative humidity	10 ~ 90%RH (non-condensing)						
	Operating environment	Prevention of dust, moisture, corrosion, electric shock and external shock						
Structure	Material	ABS and PC (flame-retardant)					Engineering plastic ABS+Glass panel	
	External dimensions	193x120x32mm			260x167x32mm		394x256x45mm	
	Panel cut dimensions	187x114mm (R7mm)			254x161mm (R7mm)		383x245mm (R7mm)	
	Weight	0.8kg			1.1kg		2.5kg	
	Installation	Panel mounting						
Feature	WiFi	Optional (802.11b/g/n)						
	Wireless	Optional (4G)						
	RFID	No	Standard	No	Standard	No	Standard	
	Satellite positioning	Optional						
	Microphone	External	Built-in	External	Built-in	External	Built-in	
	Speaker	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in	



海纳百川 诚信有为

QUADRA ELECTRONICS DWC-LLC

A2-Building-Office No-45-Business Park-Dubai south, Dubai World Central,
Dubai Logistics City, Dubai,U.A.E
info@quadraelectronics.com
www.quadraelectronics.com

XIAMEN HAIWELL TECHNOLOGY CO., LTD.

Headquarters: 13-14/F, C03 Building, Phase III Software Park,
Jimei District, Xiamen, Fujian, China
Factory: 4F, No. 336-2, Anbian Nan Road, Torch High-tech Zone (Xiang 'an)
Industrial Zone, Xiang 'an District, Xiamen, Fujian, China. 361101
Tel: +86-592-2230312 Hotline: +86-4000-360-362
Email: service@haiwell.com
Website: www.haiwell.com



Haiwell APP



Haiwell Wechat

The parameters of product are subject to changes without prior notice. (Ver I - 202412)